



# BLUE FRICTION LINE

*New blue line organic products set standards in performance and ecology.*

## Comply with demanding new performance standards while improving sustainability.

The rail industry wants to become more sustainable, and the development of new friction materials that dramatically reduce particle emissions represents a bold step forward. With new railway brake-pad materials needing to meet upcoming changes in UIC 541-3 8th edition and EN standard 15328:2020, Wabtec is once again out in front, introducing a new product family that addresses an evolving industry's performance and sustainability demands. A unique performance in dry and wet supports an easy setup of the brake system. The excellent wear behavior optimizes the life cycle cost while contributing to low particle emission during brake activation. Wabtec develops Blue Friction technology products without using substances potentially harmful to aquatic life.



## EN15328 COMPLIANT

FP 94 is a product in the Blue Friction family that has literally passed the test: it is the first organic pad to receive compliance certification according to EN15328:2020 class B1.

|                   |                  |           |
|-------------------|------------------|-----------|
| EN 15328:2020     | Class B1         | compliant |
| UIC 541-3 8th Ed. | Class B1         | compliant |
| EN 45545-2 :2020  | Class HL 1, 2, 3 | compliant |

## DESCRIPTION OF MATERIALS FOR THE BLUE FRICTION LINE


We commit to improve air and water quality to preserve our environment. We do so by developing:

- Recipes without substances harmful to aquatic life
- Recipes without carcinogenic substances
- Recipes with reduced CO<sub>2</sub> in the production process


And that are:

- Free from critical curing and processing aids
- Free from fluorides and halides
- Free from lead, asbestos, chromium, and crystalline silicates

Typical friction coefficients for wheel-mounted discs according to UIC program B1 (160 km/h) and EN15328. The tested pad was the FP 94.

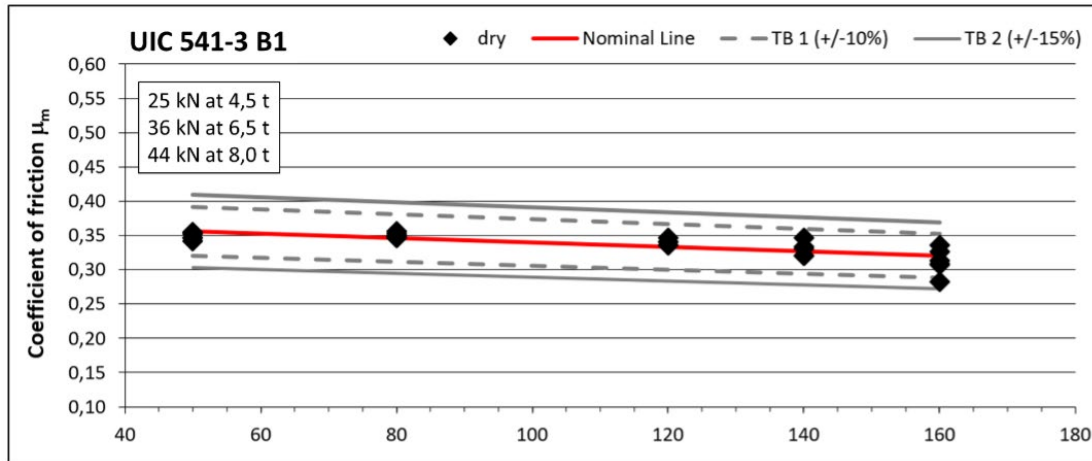

Typical friction coefficients for axle-mounted discs according to UIC program S1 (200 km/h) and EN15328. The tested pad was the FP 94.

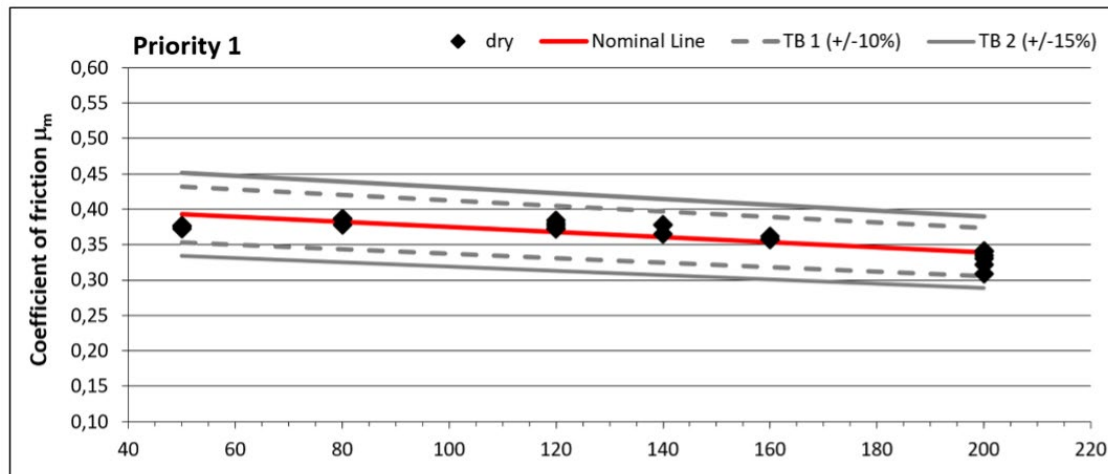

**CONTACT**

**Wabtec Corporation**  
30 Isabella Street  
Pittsburgh, PA 15212 - USA  
Phone: 412.825.1000  
Fax: 412.825.1019